

**Tested For:** Roman Maslej  
 Nelcos Distribution Inc  
 99 Six Point Road  
 Toronto, ON, M9B 4X5

**Phone:** 4168259880  
**Fax:**  
**Mobile:**  
**PO#:**  
**Email:** roman.m@nelcos.com

**Received:** 8/26/2021  
**Completed:** 8/30/2021  
**Code:** O  
**Test Report:** 3-44939-0

**Key Test:** ASTM E84 (Int Fin)

805

**Client's Identification:**

Product Description: Bodaq Interior Film Pattern RM007-FR. Adhesive Backed Architectural Vinyl Film (Embossed and Printed Vinyl-Chloride Plastic Film with an Acrylic Type Adhesive) [Paper backing removed prior to testing and applied to IRC with selfadhesive)

Test Category: Tunnel Test Specifier: BLDG(IBC): LE 2021; V 03/21; ASTM E 84: LE 2021 V 7/21 DK PC: ME BB /dv  
 TEST PERFORMED: ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials

REFERENCE: Comparable to: UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials

APPROXIMATE THICKNESS OF SPECIMEN (as measured by SGS North America): 0.009"

SPECIMEN WEIGHT (to include substrate when applicable):

Prior to Conditioning: 95.5 lbs.  
 Stabilized Weight (taken twice within 24 hours): 95.5 lbs.

**PRODUCT CATEGORY:**

- Textile Type Product
- Vinyl Type Product
- Other than Textile Type or Vinyl Type Product:

**BRIEF DESCRIPTION OF TEST:** This test method is used to determine the relative burning behavior of a material under defined test conditions. The test is performed in a 25 ft. long tunnel/duct-like apparatus and is often referred to as the "tunnel test". The test contemplates a calibration where Red Oak burns to the 24 ft. mark in 5.5 minutes ± 15 seconds. During the actual test, a 24 ft. long x 23" wide specimen rests horizontally in a ceiling configuration inside the test chamber facing downward and toward two upward oriented burners. A furnace lid that rests in a water trough seals the chamber tight. A cement board placed on the backside of each specimen assembly protects the furnace lid during the test. The near face of the specimen is subjected to a 4.5 ft. flame insult of approximately 88 kW for ten minutes. The time and distance of the spread of flame along the length of the specimen and the smoke developed as read by the photometric system are all recorded. The Flame Spread and Smoke Developed are reported as an Index.

The results contained in this report relate only to the item(s) tested. The test report shall not be reproduced except in full, without written approval from SGS North America.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 45 days only.

**Tested For:** Roman Maslej  
 Nelcos Distribution Inc  
 99 Six Point Road  
  
 Toronto, ON, M9B 4X5

**Phone:** 4168259880  
**Fax:**  
**Mobile:**  
**PO#:**  
**Email:** roman.m@nelcos.com

**Received:** 8/26/2021  
**Completed:** 8/30/2021  
**Code:** O  
**Test Report:** 3-44939-0

**Key Test:** ASTM E84 (Int Fin)

805

**SPECIMEN MOUNTING:**

- Self-supporting: The test specimen was rigid enough to be self-supporting when placed into test position. No additional support was required.
- Adhered to IRC: The test specimen was bonded to 1/4" Inorganic Reinforced Cement (IRC) boards.
- Adhered to Gypsum: The test specimen was adhered to 5/8" thick Type X gypsum board.
- Unadhered: The specimen was not adhered to any substrate. Instead, it was laid over a 2" hexagonal wire mesh screen and 1/4" rods.
- Other: \_\_\_\_\_

**SPECIMEN LENGTH:** The 24 ft. length was comprised of:

- Continuous unbroken 24 ft. length
- Sections:
  - Three 8 ft. sections butted end to end
  - Three 8 ft. sections positively joined
  - Other: \_\_\_\_\_

**ADHESIVE (applied by SGS North America):**

- No
- Yes - (specify): Self-stick adhesive

**OBSERVATIONS:**

- No unusual observations
- Burning Drips to Floor further qualified as:  Minor;  Moderate;  Major
- Delamination
- Sagging
- Shrinkage
- Fallout (specimen displacement from ceiling mount)
- Other: \_\_\_\_\_

The results contained in this report relate only to the item(s) tested. The test report shall not be reproduced except in full, without written approval from SGS North America.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 45 days only.

**Tested For:** Roman Maslej  
Nelcos Distribution Inc  
99 Six Point Road  
  
Toronto, ON, M9B 4X5

**Phone:** 4168259880  
**Fax:**  
**Mobile:**  
**PO#:**  
**Email:** roman.m@nelcos.com

**Received:** 8/26/2021  
**Completed:** 8/30/2021  
**Code:** O  
**Test Report:** 3-44939-0

**Key Test:** ASTM E84 (Int Fin)

805

**REMARKS:**

- None
- Other: \_\_\_\_\_

**RESULTS:**

Flame Spread Index: 5  
Smoke Developed: 10

**ROUNDING (Per ASTM E84 Reporting Requirements):**

Flame Spread Index value has been rounded to the nearest multiple of 5.  
Smoke Developed value has been rounded to:

Raw Data	Rounded
Less than 200	Nearest multiple of 5
200 or more	Nearest multiple of 50

**CONCLUSION:** Based on the reported Results and cited Code Classification System, the item tested is assigned a:

- Class I or A rating
- Class II or B rating
- Class III or C rating
- Fails to achieve a minimum classification thereby rendering the product unsuitable in terms of code requirement
- Based on product performance\*, ASTM E84 is not a suitable test method for the material.

\* Severe melt, drip, delamination or other behavior that destroys the continuity of the flame front such that a valid flame spread is unobtainable (See "Remarks")

The results contained in this report relate only to the item(s) tested. The test report shall not be reproduced except in full, without written approval from SGS North America. This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 45 days only.

**Tested For:** Roman Maslej  
 Nelcos Distribution Inc  
 99 Six Point Road

Toronto, ON, M9B 4X5

**Phone:** 4168259880  
**Fax:**  
**Mobile:**  
**PO#:**  
**Email:** roman.m@nelcos.com

**Received:** 8/26/2021  
**Completed:** 8/30/2021  
**Code:** 0  
**Test Report:** 3-44939-0

**Key Test:** ASTM E84 (Int Fin)

805

**DATA SUMMARY:**

Time to Ignition (minutes:seconds): 00:08  
 Maximum Flame Spread "Distance" (feet): 0.5  
 Maximum Flame Spread "Time" (seconds): 45

**CODE CLASSIFICATION SYSTEM (Please see "ASTM E84 Limitations"):**

Flame Spread Index	Smoke Developed
Class I or A: 0 - 25	450 or less
Class II or B: 26 - 75	450 or less
Class III or C: 76 - 200	450 or less

**BUILDING CODE CITATION FOR THE CLASSIFICATION SCHEME:**

- (1) 2015 edition, NFPA 101 Life Safety Code, para. 10.2.3.4
- (2) 2015 edition, NFPA 5000 Building Construction & Safety Code, para. 10.4.2
- (3) 2018 edition, International Building Code, para. 803.1.2

**LIMITATIONS OF THE ASTM E84 CLASSIFICATION SCHEME:** Most building codes will accept the ASTM E84 classifications when the interior finish product is used in a sprinklered area. Certain local authorities such as NYC have more stringent requirements, i.e. Smoke Developed ranges from a maximum 25 to 100.

If the interior finish product is a textile or vinyl wall covering used in a non-sprinklered area, the NFPA 265 room corner fire test applies.

Certain products which give off excessive heat such as but not limited to cellular plastics, cellular foam (either with or without coverings as applicable), polypropylene, and high density polyethylene should be tested by NFPA 286 - Standard Methods of Fire Tests for Evaluating Contribution of Wall and Ceiling Interior Finish to Room Fire Growth. In SGS North America's opinion, the codes require NFPA 286 for such products, even in sprinklered areas.

The results contained in this report relate only to the item(s) tested. The test report shall not be reproduced except in full, without written approval from SGS North America. This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 45 days only.

**Tested For:** Roman Maslej  
Nelcos Distribution Inc  
99 Six Point Road

Toronto, ON, M9B 4X5

**Phone:** 4168259880  
**Fax:**  
**Mobile:**  
**PO#:**  
**Email:** roman.m@nelcos.com

**Received:** 8/26/2021  
**Completed:** 8/30/2021  
**Code:** 0  
**Test Report:** 3-44939-0

**Key Test:** ASTM E84 (Int Fin)

805

CERTIFICATION: I certify that the reported results were obtained after testing specimens in accordance with the procedures and equipment specified above.

\_\_\_\_\_  
AUTHORIZED SIGNATURE  
SGS NORTH AMERICA  
/jab *jal*

Enclosure: Graphs

Test Engineer: Jimmy Rosinsky

SEP 01 2021

*Bobby Brown*


The results contained in this report relate only to the item(s) tested. The test report shall not be reproduced except in full, without written approval from SGS North America.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 45 days only.

Test Method : ASTM E84  
 Test Report # : 3-44939-0-0  
 Date : 8/30/2021  
 Client : Nelcos Distribution Inc.  
 Operator : Jimmy Rosinsky  
 Details of Preparation : The test specimen was bonded to 1/4" Inorganic Reinforced Cement (IRC) boards. The 24 ft. length was comprised of three 8 ft. sections butted end to end.  
 Observations : No unusual observations

Area Under Flame Curve (ft min) : 4.90  
 Raw Flame Spread Index (ft min) : 2.53  
 Rounded Flame Spread Index (ft min) : 5  
 Ignition Time : 00:08 mm:ss  
 Area Under Smoke Curve (%A min) : 7.85  
 Raw Smoke-Developed Index : 7.81  
 Rounded Smoke-Developed Index : 10  
 Total Gas Flow(L) : 1609.6  
 Total Gas Flow(ft<sup>3</sup>) : 56.8  
 Maximum Flame Front Achieved(ft) : 0.5 (@45s)

Flame Progression vs. Time

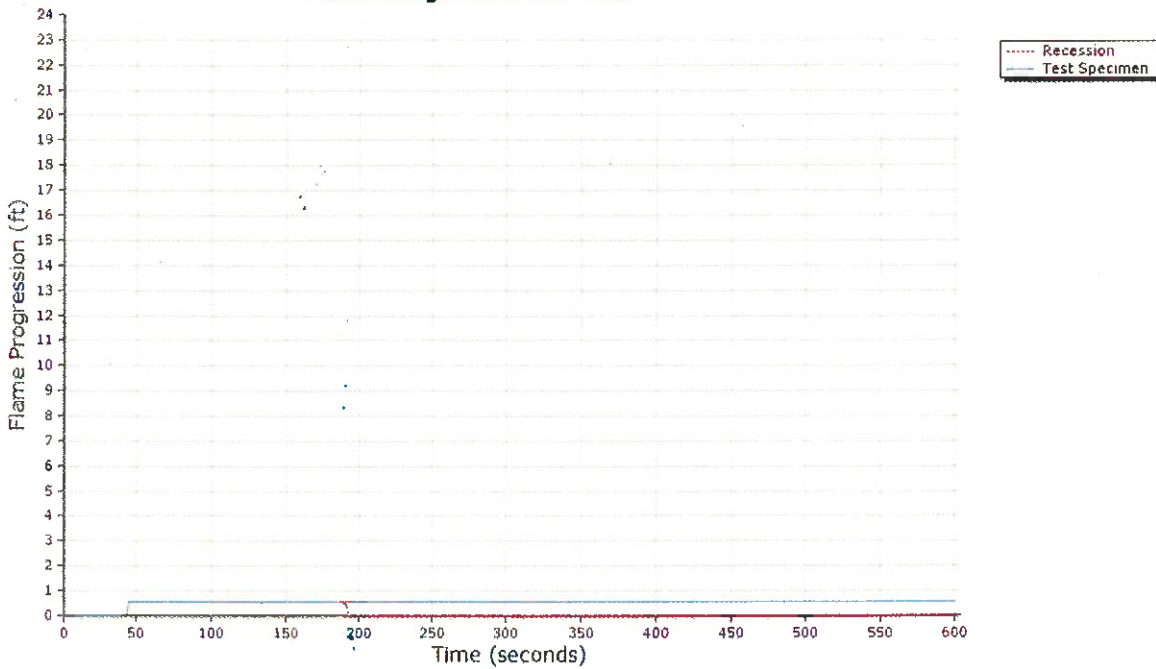

Test Method : ASTM E84  
Test Report # : 3-44939-0-0

Light Absorption vs. Time

